


# Flange Head Knurled Body

Open End



Steel - Zinc & Clear | A2 Stainless Steel

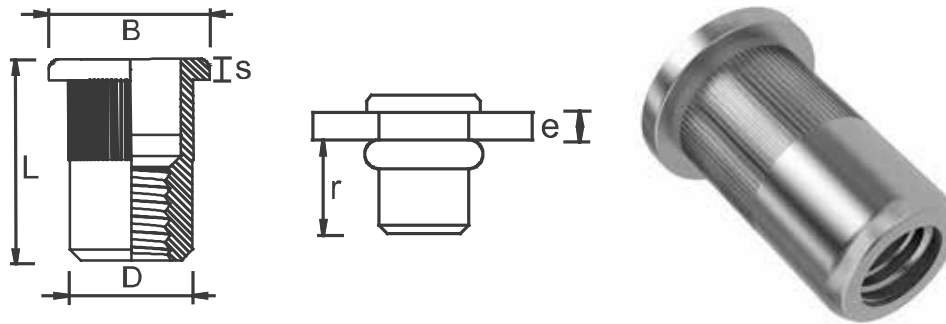

Dimensions - Steel - Zinc & Clear:

Thread	Hole size +0.1/-0.0mm	Body diameter (D) +0.07/-0.1mm	Head diameter (mm) (B)	Overall length (mm) (L)	Head thickness (mm) (S)	Grip range (mm) (e)	Head style	(r) Dimension (mm)	Body Style
M3	5.0	4.9	8.0	10.0	0.8	0.5 - 1.5	Flange	6.0	Knurled
M4 short	6.0	5.9	9.0	10.5	0.8	0.5 - 2	Flange	6.0	Knurled
M4 medium	6.0	5.9	9.0	12.0	0.8	2.0 - 3.5	Flange	6.0	Knurled
M5 short	7.0	6.9	10.0	13.0	1.0	0.5 - 2.5	Flange	7.5	Knurled
M5 medium	7.0	6.9	10.0	16.5	1.0	2.5 - 5	Flange	8.5	Knurled
M6 short	9.0	8.9	12.3	15.5	1.3	0.5 - 3	Flange	9.2	Knurled
M6 medium	9.0	8.9	12.3	19.5	1.3	3 - 5.5	Flange	10.5	Knurled
M8 short	11.0	10.9	14.5	18.5	1.5	1 - 3.5	Flange	11.5	Knurled
M8 medium	11.0	10.9	14.5	21.0	1.5	3.5 - 6	Flange	11.5	Knurled
M10 short	12.0	11.9	16.0	19.0	1.6	1.0 - 3.5	Flange	11.0	Knurled
M10 medium	12.0	11.9	15.8	22.3	2.0	3 - 6	Flange	14.0	Knurled
M10 short alt	13.0	12.9	17.0	21.5	1.7	1.0 - 4	Flange	11.0	Knurled
M12	16.0	15.9	22.0	25.0	2.0	1.0 - 3.5	Flange	15.0	Knurled

Dimensions - A2 Stainless Steel:

Thread	Hole size +0.1/-0.0mm	Body diameter (D) +0.07/-0.1mm	Head diameter (mm) (B)	Overall length (mm) (L)	Head thickness (mm) (S)	Grip range (mm) (e)	Head style	(r) Dimension (mm)	Body Style
M4	6.0	5.9	9.0	10.5	0.8	0.5 - 2	Flange	6.5	Knurled
M5	7.0	6.9	10.0	13.0	1.0	0.5 - 2.5	Flange	8.0	Knurled
M6	9.0	8.9	12.3	15.5	1.3	0.5 - 3	Flange	9.2	Knurled
M8	11.0	10.9	14.5	18.5	1.5	1 - 3.5	Flange	11.5	Knurled
M10	13.0	12.9	17.0	21.0	1.6	1 - 4.0	Flange	13.5	Knurled

How to specify part numbers for Blind Rivet Nuts: Thread - Head - Style - Material - Body

Example: M6, flange head, open end, steel, knurled body = M6 - FLG - OE - ST - KG (SHORT)